

A60



ASC
COM

FEATURES

- Aluminum die-casting housing wrapped by thermalplastic
- Constant current driver
- Base type: E27, E26, B22

WW(2700-3000K) NW(4000-4500K) WW(6000-7000K)




7000 K



6000 K



5000 K



4000 K



3000 K


9.5W replaces 60W
Incandescent Bulb

25.000H



A60

DIA. [Φ] xH mm



ITEM TECHNICAL DATA

SERIES	A60	A60	A60
VOLTAGE	AC 100-250V	AC 100-250V	AC 100-250V
CRI	>80	>80	>80
LUMEN	806lm	638lm	470lm
WATT	9.5W	8W	5.8W
POWER FACTOR	PF>0.9	PF>0.85	PF>0.8
TYPE	COB	COB	COB
COLOR	WW/NW/CW	WW/NW/CW	WW/NW/CW
ANGLE	160°	160°	160°
DIA. [Φ]xH	60x118MM	60x118MM	60x118MM

B60



ASCI COM


FEATURES

- Aluminum die-casting housing wrapped by thermalplastic
- Constant current driver
- Base type:E27,E14

WW(2700-3000K) NW(4000-4500K) WW(6000-7000K)




5.4W replaces **40W**
Incandescent Bulb



B60

DIA [Ø] xH mm

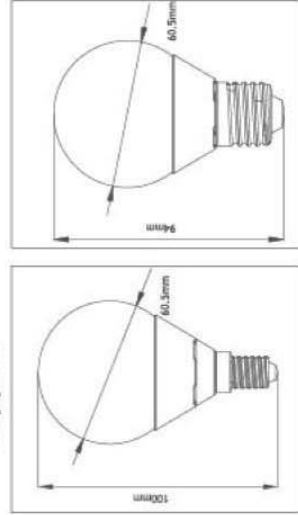

ITEM TECHNICAL DATA

SERIES	B60	B60	B60	B60
VOLTAGE	AC 100-250V	AC 100-250V	AC 100-250V	AC 100-250V
CRI	>80	>80	>80	>80
LUMEN	470lm	396lm	323lm	249lm
WATT	5.4W	4.5W	4W	3.3W
POWER FACTOR	PF>0.8	PF>0.75	PF>0.75	PF>0.7
TYPE	COB	COB	COB	COB
COLOR	WW/NW/CW	WW/NW/CW	WW/NW/CW	WW/NW/CW
ANGLE	160°	160°	160°	160°
DIA. [Ø]xH	60.5x100MM/60.5x94MM	60.5x100MM/60.5x94MM	60.5x100MM/60.5x94MM	60.5x100MM/60.5x94MM

B45




ASCI COM

FEATURES

- Aluminum die-casting housing wrapped by thermalplastic
- Constant current driver
- Base type:E27, E14

WW(2700-3000K) NW(4000-4500K) WW(6000-7000K)

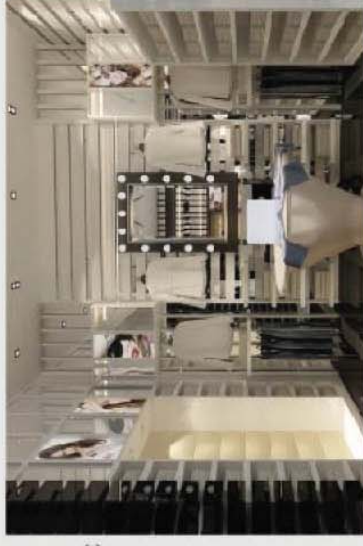


5.4W replaces 40W Incandescent Bulb

25.000H



B45

DIA. [Φ] x H mm

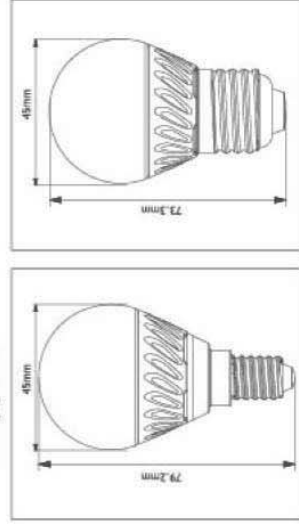

ITEM TECHNICAL DATA

SERIES	B45	B45	B45	B45
VOLTAGE	AC 100-250V	AC 100-250V	AC 100-250V	AC 100-250V
CRI	>80	>80	>80	>80
LUMEN	470lm	396lm	323lm	249lm
WATT	5.4W	4.5W	4W	3.3W
POWER FACTOR	PF>0.8	PF>0.75	PF>0.75	PF>0.7
TYPE	COB	COB	COB	COB
COLOR	WW/NW/CW	WW/NW/CW	WW/NW/CW	WW/NW/CW
ANGLE	160°	160°	160°	160°

C30




ASCI COM

FEATURES

- Aluminum die-casting housing wrapped by thermalplastic
- Constant current driver
- Base type:E27, E14

WW(2700-3000K) NW(4000-4500K) WW(6000-7000K)

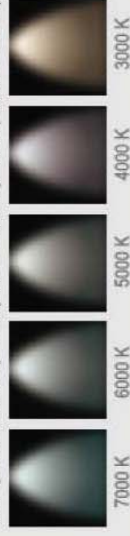


5.4W replaces 40W Incandescent Bulb



C30

DIA. [Ø] x H mm

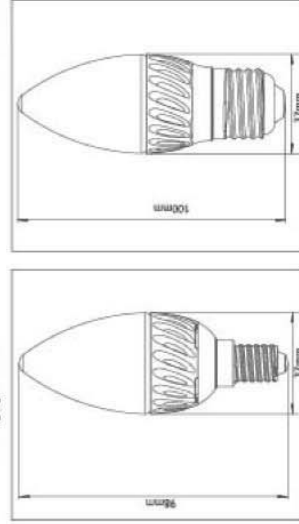

ITEM TECHNICAL DATA

SERIES	C30	C30	C30	C30
VOLTAGE	AC 100-250V	AC 100-250V	AC 100-250V	AC 100-250V
CRI	>80	>80	>80	>80
LUMEN	470lm	396lm	323lm	249lm
WATT	5.4W	4.5W	4W	3.3W
POWER FACTOR	PF>0.8	PF>0.75	PF>0.75	PF>0.7
TYPE	COB	COB	COB	COB
COLOR	WW/NW/CW	WW/NW/CW	WW/NW/CW	WW/NW/CW
ANGLE	160°	160°	160°	160°
DIA. [Ø]xH	37x98MM/37x100MM	37x98MM/37x100MM	37x98MM/37x100MM	37x98MM/37x100MM

C30L




ASC COM

FEATURES

- Aluminum die-casting housing wrapped by thermalplastic
- Constant current driver
- Base type: E27, E14

WW(2700-3000K) NW(4000-4500K) WW(6000-7000K)


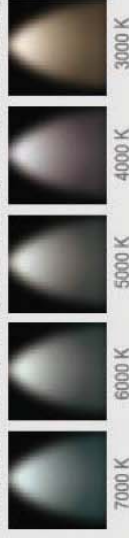


5.4W replaces 40W
Incandescent Bulb



C30L

DIA [Ø] xH mm



ITEM TECHNICAL DATA

SERIES	C30L	C30L	C30L	C30L
VOLTAGE	AC 100-250V	AC 100-250V	AC 100-250V	AC 100-250V
CRI	>80	>80	>80	>80
LUMEN	470lm	396lm	323lm	249lm
WATT	5.4W	4.5W	4W	3.3W
POWER FACTOR	PF>0.8	PF>0.75	PF>0.75	PF>0.7
TYPE	COB	COB	COB	COB
COLOR	WW/NW/CW	WW/NW/CW	WW/NW/CW	WW/NW/CW
ANGLE	160°	160°	160°	160°
DIA. [Ø]XH	37x131MM/37x134MM	37x131MM/37x134MM	37x131MM/37x134MM	37x131MM/37x134MM